

# Technical Data Sheet

## optibelt ALPHA POWER AT10 - HF

### PU Timing Belt, Cast Polyurethane, Endless




#### Dimensions, Tolerances

Profile:	AT10
Tooth pitch t:	10 mm
Total thickness:	5 mm
Tooth height:	2.5 mm
Tooth tip width:	5 mm
Tooth flank angle:	50°
Length tolerance:	See table
Width tolerance, b ≤ 50 mm:	±0.5 mm
Thickness tolerance:	±0.3 mm

#### Construction

Polyurethane: Thermoset, 86 +/-4 Shore A, grey  
Tension cord: Steel, high flexible, Ø 0.9 mm

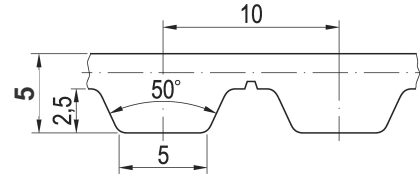

#### Specific nominal power transmittable per tooth

Speed, small pulley n <sub>k</sub> [1/min]	Specific nom. power P <sub>N spez</sub> [W/mm]	Speed, small pulley n <sub>k</sub> [1/min]	Specific nom. power P <sub>N spez</sub> [W/mm]	Speed, small pulley n <sub>k</sub> [1/min]	Specific nom. power P <sub>N spez</sub> [W/mm]
0 <sup>1</sup>	0.000	1200	1.231	3600	2.468
20	0.032	1300	1.303	3800	2.538
40 <sup>2</sup>	0.063	1400	1.373	4000	2.604
60	0.093	1500	1.440	4500	2.755
80 <sup>3</sup>	0.123	1600 <sup>7</sup>	1.505	5000	2.886
100	0.151	1700	1.569	5500	3.000
200 <sup>4</sup>	0.286	1800	1.629	6000	3.098
300	0.408	1900	1.689	6500	3.181
400 <sup>5</sup>	0.521	2000	1.746	7000	3.250
500	0.627	2200	1.855	7500	3.308
600	0.726	2400	1.958	8000	3.354
700	0.820	2600	2.055	8500	3.388
800 <sup>6</sup>	0.910	2800	2.147	9000	3.412
900	0.995	3000	2.234	9500	3.427
1000	1.077	3200 <sup>8</sup>	2.316	10000	3.432
1100	1.155	3400	2.394	v <sub>max</sub> = 80 m/s	

#### Nominal power P<sub>N</sub>

$$P_N = P_{N\ spez} \cdot z_k \cdot z_{eB} \cdot b / 10^3 \quad [\text{kW}]$$

P <sub>N spez</sub>	Specific nominal power transmittable per tooth [W/mm]
z <sub>k</sub>	Number of teeth, small pulley
z <sub>eB</sub>	Number of teeth in mesh, small pulley, limited to z <sub>eB max</sub>
z <sub>eB max</sub>	12, maximum allowable no. of teeth
b	Belt width [mm]

#### Nominal torque M<sub>N</sub>

$$M_N = P_N \cdot 9.55 \cdot 10^3 / n_k \quad [\text{Nm}]$$

n<sub>k</sub> Speed, small pulley [1/min]

#### Nominal tensile force F<sub>N</sub>

$$F_N = F_{N\ spez} \cdot z_{eB} \cdot b \quad [\text{N}]$$

$$F_{N\ spez} = P_{N\ spez} \cdot 6 \cdot 10^4 / (n_k \cdot t) \quad [\text{N/mm}]$$

F <sub>N spez</sub>	Specific nominal tensile force transmittable per tooth [N/mm]
t	Tooth pitch [mm]


<sup>1</sup>F<sub>N spez</sub> [N/mm] 9.750 <sup>2</sup>9.455 <sup>3</sup>9.195 <sup>4</sup>8.567 <sup>5</sup>7.816 <sup>6</sup>6.825 <sup>7</sup>5.646 <sup>8</sup>4.343

#### Cord tensile forces, belt weight

Belt width <sup>1</sup> b [mm]	10	12	16	20	25	32	50	75	100
Breaking strength F <sub>Br</sub> [N]	5920	7120	10680	13080	17840	22600	36880	57120	77320
Allowable tensile force <sup>2</sup> F <sub>zul</sub> [N]	1480	1780	2670	3270	4460	5650	9220	14280	19330
Weight per metre [kg/m]	0.063	0.075	0.100	0.125	0.157	0.201	0.314	0.470	0.627

<sup>1</sup> Other and intermediate widths possible <sup>2</sup> Allowable tensile force F<sub>zul</sub> equivalent to 25% breaking strength F<sub>Br</sub> of the cords

#### Timing belt pulleys, inside and outside idlers

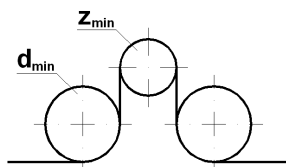

No. of teeth: z<sub>min</sub> = 12  
Pitch-Ø: d<sub>w min</sub> = 38.20 mm  
Plane, cylindrical idlers, Ø  
Inside idler: d<sub>min</sub> = 35 mm  
Outside idler: d<sub>min</sub> = 80 mm

#### Length tolerances, shown as centre distance tolerances

Length L <sub>w</sub> [mm]	Tolerance a <sub>L Tol</sub> [mm]	Length L <sub>w</sub> [mm]	Tolerance a <sub>L Tol</sub> [mm]
≤ 305	± 0.14	> 780 ≤ 990	± 0.28
> 305 ≤ 390	± 0.16	> 990 ≤ 1250	± 0.32
> 390 ≤ 525	± 0.18	> 1250 ≤ 1560	± 0.38
> 525 ≤ 630	± 0.21	> 1560 ≤ 1960	± 0.44
> 630 ≤ 780	± 0.24	> 1960 ≤ 2350	± 0.52