


| Innenlänge Inside length [mm] | Längentoleranz Length tolerance [mm] | Satztoleranz Set tolerance [mm] |
|-------------------------------------|--|---------------------------------------|
| 1170 < Li ≤ 2000 | ± 5 | 4 |
| 2000 < Li ≤ 2200 | ± 5 | 8 |
| 2200 < Li ≤ 3000 | ± 8 | 8 |
| 3000 < Li ≤ 3150 | ± 10 | 8 |
| 3150 < Li ≤ 5000 | ± 10 | 12 |
| 5000 < Li ≤ 7000 | ± 15 | 20 |
| 7000 < Li ≤ 8000 | ± 20 | 20 |
| 8000 < Li ≤ 10000 | ± 20 | 32 |

Prinzip-Skizze
Principle sketch

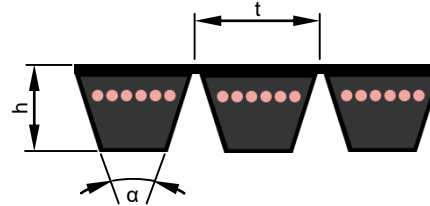

| Profil / Section: A KB | | |
|------------------------|----------------|--------|
| t [mm] | h [mm] | α [°] |
| 15,88 ± 0,6 | 10,0 +0,8/-0,4 | 39 ± 2 |

Aufbau des Riemens:

1. Deckplatte aus CR/SBR
2. Umhüllungsweben
3. SBR/NR Mischung
4. Polyester
5. SBR/NR Mischung

V-Belt construction:

1. CR/SBR joining plate
2. Cover fabric
3. SBR/NR compound
4. Polyester
5. SBR/NR compound

Riemensätze müssen im Satz bestellt werden
Belt sets must be ordered as a set

Kennzeichnungsbeispiel / Marking example:




Werkscodes / Plant code


Profil / Profile Länge / Length
La ≈ Li + 36

Jahreszeichen / Year code

Längen-Messbedingungen nach DIN 2215 und ISO 4183
Length measurement according to DIN 2215 and ISO 4183

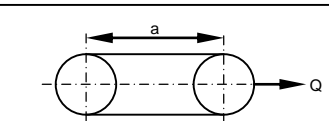

| | |
|--------------------------------------|--------------|
| U _a [mm] | 254 |
| d _a [mm] | 80,85 ± 0,13 |
| b ₁ [mm] | 12,45 ± 0,13 |
| α [°] | 32 ± 15' |
| t _{min} [mm] | 12,5 |
| e [mm] | 15,88 |
| Q je Rippe [N] | 300 |
| L _a = 2a + U _a | |

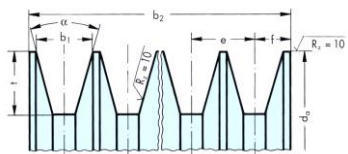

optibelt KB

Wir beraten Sie gerne über die Produkteigenschaften und -anpassungen bei besonderen Anforderungen. Bitte beachten Sie auch die Hinweise in den Optibelt Dokumentationen. Irrtümer und technische Änderungen vorbehalten. www.optibelt.com, © Optibelt GmbH
We would be pleased to offer advice about technical characteristics and drive design as well as special requirements. Further information can be found in Optibelt documentation. Subject to technical modification and change, errors and omissions excepted. www.optibelt.com, © Optibelt GmbH

| | | | |
|-------|------------|------------|------|
| 4 | | | |
| 3 | | | |
| 2 | | | |
| 1 | Freigabe | 18.05.2016 | HGr |
| 0 | Erstellt | 18.05.2016 | MJr |
| Zust. | Änderungen | Datum | Name |

Profil A

Dateiname: Datenblatt_optibelt KB VB_A.pdf